


PROJECT:	SPECIFIER:	TYPE:	QTY:	DATE:
1	2	3	4	5
6	7	8	9	10



TECH OPTIONS

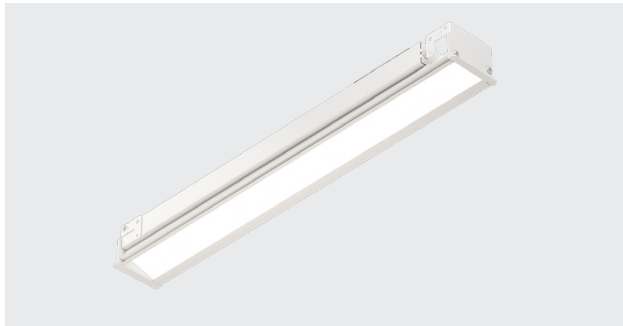


DESCRIPTION

Specification grade recessed grid luminaire. Matte white powder coated aluminum extrusion and steel housing with elegant light guide engineered for diffused illuminance. Single vaulted light guide configuration for many applications including asymmetric wall washing and grazing. Architectural solution for suspended ceiling applications.

FEATURES

- Housing:** matte white powder coated aluminum extrusion and steel
- Footprint:** 1x4' single light guide
- Optic:** vaulted single light guide for diffused illuminance
- Beams:** asymmetric beam
- Mounting:** versatile mounting into any grid system for uniform, consistent tile and ceiling appearance
- LED:** Static white CRI 80+

DIMENSIONS



WARRANTY 5 Year Limited Warranty (Covers Standard Components)

RATINGS & CERTS

Made In USA
Damp Location Rated



1: TYPE	MT12-RL	2ft grid, single unit
	MT14-RL	4ft grid, single unit
	MT16-RL	6ft grid, single unit
	MT18-RL	8ft grid, single unit
2: LED COLOR & CRI	SW80-30K	3000K Static White 80+
	SW80-35K	3500K Static White 80+
	SW80-40K	4000K Static White 80+
3: LUMENS	05LM	500 lm/ft
	07LM	750 lm/ft
	10LM	1000 lm/ft
4: VOLTAGE	U	120-277Vac
	3	347Vac
	4	347-480Vac
5: DIMMING / DRIVER	10V	Dim 0-10V dimming to <10%
	10V1	1% Dim 0-10V
	10VZ1	0.1% Dim 0-10V
	LDE5	5% Dim Lutron Digital Ecosystem
	LDE1	1% Dim Lutron Hi-Lume EcoSystem Soft-on & Fade Black
6: OPTIC	BAS	Narrow, Asymmetric
	BAM	Medium, Asymmetric
	BAW	Wide, Asymmetric
7: FINISH	WH	Matte White
	BK	Matte Black
	XX	Custom
8: MOUNTING	FT	Flat 9/16" & 15/16" T-Bar
	FL	Fineline 9/16" T-Bar
	DFK	Drywall Flange Kit
9: CONTROL	VIVE	Integrated Lutron VIVE
	ANL	Integrated Acuity nLight
	AIRNL	Integrated Acuity nLight Air
	CAS	Casambi Ready
	ENT	Integrated Enlighted
10: ACCESSORIES	BB7	Battery Backup 7W for 90 mins
	BB11	Battery Backup 11W for 90 mins
	BB24	Battery Backup 24W for 90 mins
	347STEP	Separate 347-277Vac Step Down Transformer
	480STEP	Separate 480-277Vac Step Down Transformer

LED OUTPUT INFO

Standard White LED 80+ CRI @ 4000K (nominal) - 4ft length

Ordering Code	Lumens, Nominal Delivered	Input Power, Nominal	Efficacy, Nominal
05LM	2032 lm	18.3W	111 lm/W
07LM	3048 lm	27.4W	111 lm/W
10LM	4064 lm	36.6W	111 lm/W

LED OUTPUT INFO**Standard White LED 80+ CRI @ 4000K (nominal)**

Ordering Code	Lumens, Nominal Delivered	Input Power, Nominal	Efficacy, Nominal
05LM	2032 lm	18.3W	111 lm/W
07LM	3048 lm	27.4W	111 lm/W
10LM	4064 lm	36.6W	111 lm/W