

PROJECT:	SPECIFIER:	TYPE:	QTY:	DATE:
----------	------------	-------	------	-------

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---



TECH OPTIONS



SPECIFICATIONS

Specification grade recessed grid luminaire with elegant vertical light guide, providing indirect lighting with no glare. Edge-lit light guide with sleek 3/8 inch extrusion. Matte white powder coated steel and customizable accent bar option. Discerning solution for suspended ceiling applications.


HUMAN CENTRIC TECH

Human centric option available to achieve a specific Melanopic Ratio (MR). OPUS delivers high MR in warm CCTs for healthy lighting that is comfortable, invigorating, and renders vibrant colors via Verve LED chip, enabling typical Melanopic Ratios to be specified. Natural skin tones and excellent red (RA>90). Enhanced MR provides healthy daytime lighting with warmer CCTs.

FEATURES

- Housing:** matte white powder coated steel, 2in height w/integral battery backup
- Footprint:** 2'x2', 2'x4' recessed grid
- Optic:** elegant vertical light guide for no glare, accent bar color option
- Beam:** double asymmetric wide
- Lumen Output (nominal):** up to 5000 lm, 90 lm / W
- Mounting:** Type IC, side clips integrated
- LED:** Verve human centric, Static white CRI 80+ & 90+, tunable white

DIMENSIONS

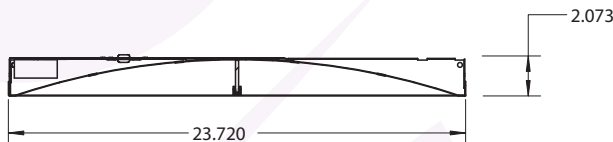

WARRANTY 5 Year Limited Warranty (Covers Standard Components)

RATINGS & CERTS

Made In USA with Global Components
Damp Location Rated



1: TYPE	CLS24-RL	New 2x4
	CLS22-RL	New 2x2
2: LED COLOR & CRI	SW80-27K	2700K Static White 80+
	SW80-30K	3000K Static White 80+
	SW80-35K	3500K Static White 80+
	SW80-40K	4000K Static White 80+
	SW80-50K	5000K Static White 80+
	SW90-27K	2700K Static White 90+
	SW90-30K	3000K Static White 90+
	SW90-35K	3500K Static White 90+
	SW90-40K	4000K Static White 90+
	SW90-50K	5000K Static White 90+
	VV90-30K	3000K Verve 90+
	VV90-35K	3500K Verve 90+
	VV90-40K	4000K Verve 90+
VV90-50K	5000K Verve 90+	
TW90-5027K	Tunable White 5000 - 2700K 90+	
3: LUMENS	22LM*	2200 lm
	27LM**	2700 lm
	35LM	3500 lm
	40LM	4000 lm
	50LM	5000 lm
<small>*2x2 tunable white max *2x2 static white max, 2x4 tunable white max</small>		
4: VOLTAGE	U	120-277Vac
	3	347Vac
	4	347- 480Vac
5: DIMMING / DRIVER	10V	Dim 0-10V dimming to <10%
	10V1	1% Dim 0-10V
	10VMCZ1	0.1% Dim 0-10Vx2 dim-to-off for tunable white
	LDE5	5% Dim Lutron Digital Ecosystem
	LUT1	1% Dim Lutron Hi-Lume EcoSystem Soft-on & Fade Black
	LUTZ1	0.1% Dim Lutron Hi-Lume Premium EcoSystem Soft-on & Fade Black
	ELDZ1	0.1% Dim eldoLED SOLOdrive dim-to-off
<small>*Driver uses logarithmic dimming curve as standard. For linear curve add "LIN" after Dimming Code</small>		
6: OPTIC	WH	Light Guide, Matte White Accent Bar
	BK	Light Guide, Matte Black Accent Bar
	SB	Light Guide, Sky Blue Accent Bar
	MC	Light Guide, Graphite Accent Bar
	LL	Light Guide, Lilac Accent Bar
	XX	Custom
7: CONTROL	VIVE	Integrated Lutron VIVE
	ANL	Integrated Acuity nLight
	AIRNL	Integrated Acuity nLight Air
	CAS	Casambi Ready
	ENT	Integrated Enlighted
8: ACCESSORIES	BB4	Battery Backup 4W for 90 mins
	BB8	Battery Backup 8W for 90 mins
	347STEP	Separate 347-277Vac Step Down Transformer
	480STEP	Separate 480-277Vac Step Down Transformer